

One of the most important Italian manufacturer of temperature probes for the industrial and commercial refrigeration, air conditioning and heating markets.

PTC, NTC, THERMO-RESISTANCES and THERMOCOUPLES are the main probe types available with various suggested configurations or required by the customer, intended for plastics, food and automotive industry and for all the applications in which thermoregulation is needed.

The main goal of the company is the customer satisfaction, by integrating the production with design/configuration and customization services.





The use of solutions, products and processes, reinforced by professional competence and the implementation of the KaizenLean principles, ensure the highest quality standard.

Sacet, presents both on the Italian and foreign market, is able to reply to the customers inquiries with a technical and commercial concrete support.

Via Del Candel 55/D, 32100, Belluno, Italy
Tel. +39 0437 33166
Web site: www.sacet-probes.com
E-mail: info@sacet-probes.com

SACET SRL

SINCE 1985

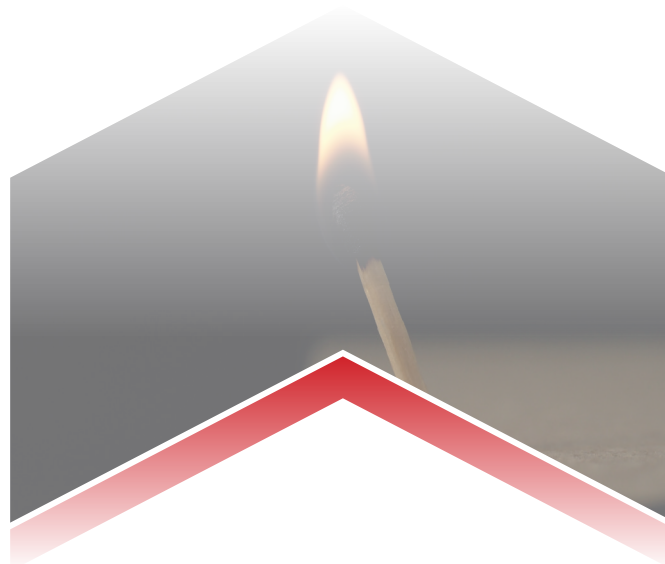

Via Del Candel 55/D, 32100, Belluno, Italy
Tel. +39 0437 33166
Web site: www.sacet-probes.com
E-mail: info@sacet-probes.com



SONDE ATEX ATEX PROBES

Via Del Candel 55/D, 32100, Belluno, Italy
Tel. +39 0437 33166
Web site: www.sacet-probes.com
E-mail: info@sacet-probes.com

IP67 temperature probe
with double insulated silicone cable
sensing element NTC R(25°C)=10kohm
stainless steel tube ø4x40 mm
sensor potted in polyurethane resin




Reference regulation: Directive 2014/34/UE (ATEX);
EN IEC 60079-0: 2018; EN 60079-7:
2015+A1: 2018




Type of protection: Ex ec IIC Gc
(our ATEX temperature probes can be installed in explosive
atmospheres due to the presence of gas in zone 2)



IP67 temperature probe
with double insulated silicone cable
sensing element NTC R(25°C)=10kohm
stainless steel tube ø6x40 mm
sensor potted in thermally conductive silicone grease

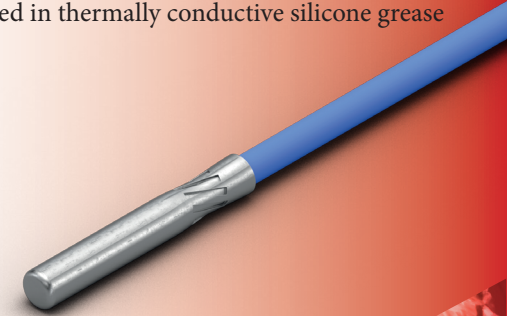

IP67 temperature probe
with double insulated silicone cable
sensing element NTC R(25°C)=10kohm
stainless steel tube ø6x40 mm
sensor potted in polyurethane resin

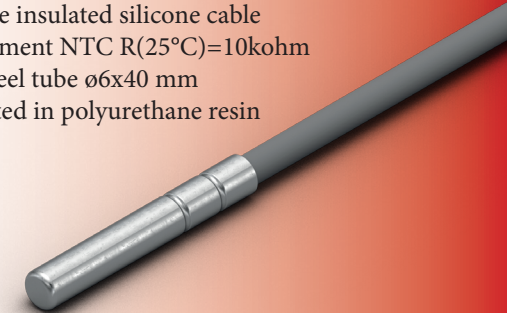

IP68 strap-on temperature probe
with double insulated
thermoplastic rubber cable
sensing element NTC R(25°C)=10kohm
overmoulded thermoplastic rubber head
with fixing bracelet

